



Next Generation R-Series Oil-Flooded Rotary Screw Air Compressors

30-37 kW (40-50 hp)



Ingersoll Rand works to keep you ahead of your competition with Next Generation R-Series air compressors that boost productivity, lower operating expenses and extend equipment life.

Next Generation R-Series air compressors. The intelligence you need—to win.

World-Class Performance


- **State-of-the-art airend** delivers as much as 18% improved efficiency and best-in-class airflow capacity
- **PAC™ protection, V-Shield™ technology and free-floating cooling system** help maximize uptime
- **Xe-Series controller delivers increased control functionality** through an intuitive user interface and remote access with any common, current web browser
- **Optional Total Air System (TAS) package** available with space-saving, ready-to-run, pre-mounted dryer and filter
- **NEMA Premium® efficiency motor** delivers significant energy savings, and the optional variable speed drive (VSD) further decreases energy demands

i Ingersoll Rand – 60 Hz Performance							
Model	Max. Pressure psig	Nominal Power kW (hp)	Capacity (FAD)* cfm	Dimensions (Length x Width x Height) in	Standard lb	Weight	
						Standard	Air-cooled TAS ¹
30i	110	30 (40)	196	76 x 42 x 60	2,304	2,304	2,535
	125	30 (40)	184	76 x 42 x 60	2,304	2,304	2,535
	145	30 (40)	164	76 x 42 x 60	2,304	2,304	2,535
	200	30 (40)	132	76 x 42 x 60	2,304	2,304	2,535
37i	110	37 (50)	231	76 x 42 x 60	2,414	2,414	2,646
	125	37 (50)	220	76 x 42 x 60	2,414	2,414	2,646
	145	37 (50)	197	76 x 42 x 60	2,414	2,414	2,646
	200	37 (50)	162	76 x 42 x 60	2,414	2,414	2,646
ie Ingersoll Rand – 60 Hz Performance							
30ie	110	30 (40)	202	77 x 46 x 64	2,403	2,403	2,788
	125	30 (40)	190	77 x 46 x 64	2,403	2,403	2,788
	145	30 (40)	173	77 x 46 x 64	2,403	2,403	2,788
	200	30 (40)	134	77 x 46 x 64	2,403	2,403	2,788
37ie	110	37 (50)	250	77 x 46 x 64	2,513	2,513	2,899
	125	37 (50)	245	77 x 46 x 64	2,513	2,513	2,899
	145	37 (50)	215	77 x 46 x 64	2,513	2,513	2,899
	200	37 (50)	173	77 x 46 x 64	2,513	2,513	2,899
n Ingersoll Rand – 60 Hz Performance							
30n	65-145	30 (40)	74-195	76 x 42 x 60	2,370	2,370	2,601
37n	65-145	37 (50)	74-231	76 x 42 x 60	2,509	2,509	2,740

* FAD (Free Air Delivery) is full package performance including all losses, tested per ISO 1217:2009 Annex C
¹ 30i/37i and 30n/37n TAS units deliver ISO Class 1.5.1 quality air and 30/37ie TAS units deliver ISO Class 1.4.1 quality air, measured at steady state conditions in accordance with ISO 8573-1:2010, with inlet air to package of 25°C (77°F) and RH of 60%

Max. Current Draw (A) @ 60 Hz*									
Rated Voltage V	Full Load Current (A)								
	30i		37i		30ie		37ie		
	Std.	TAS	Std.	TAS	Std.	TAS	Std.	TAS	
200	140	147	161	170	140	150	173	182	
230	122	128	140	148	122	130	150	158	
460	61	64	70	74	61	65	75	79	
575	49	51	56	59	49	52	60	63	

*Data provided for reference only and subject to change. Follow NEC and local codes for sizing and installation guidelines.

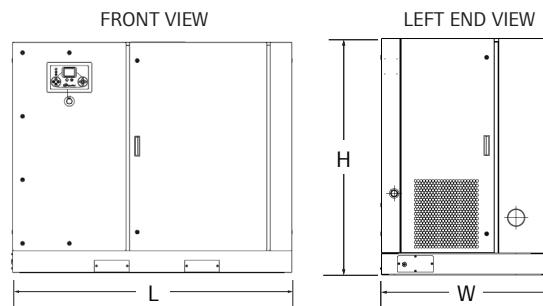

Standard Features		Fixed Speed <i>i</i> and <i>ie</i>	Variable Speed <i>n</i>
Category	Description		
Airend	Premium performance airend	●	●
Controller	Energy-saving controller easy to operate in over 30 languages	●	●
	Programmable start/stop operation and remote connectivity	●	●
	Built-in optimization sequencer for up to four units	●	●
PAC™ Protection	Scans and adjusts operating parameters in response to filtration changes	●	●
	Real-time electronic maintenance indicators and shutdown protection	●	●
Cooling System	Air-cooled free-floating cooling system optimized for efficiency & serviceability	●	●
	Energy-efficient and low-noise centrifugal blower	●	●
	Free-floating cooling system rated for 115°F (46°C) ambient	●	●
	Moisture separator	●	●
V-Shield™ Technology	Electronic no-loss condensate drains	□	○
	Stainless steel air piping	●	●
	Vibration isolation pads and premium metal-flex hoses	●	●
Auxiliary Systems	Repeatable leak-free connections with superior elastometric seals	●	●
	Noise attenuation enclosure	●	●
	Package pre-filtration	●	●
Motors & Electrical Systems	Long-life filtration and separation elements	●	●
	8,000 hour life Ultra Coolant™	●	●
	Flow control by full load/no load regulation system	●	●
	Control panel protection, NEMA 4	●	
	Control panel protection, NEMA 12		●
General Features	Star-delta reduced voltage starter	●	
	NEMA Premium TEFC IP55 motors - Class F insulation with B rise	●	●
	Simple ducting (single air inlet and single air outlet)	●	●
	12-month full package warranty	●	●
Optional Features			
Harsh Condition Operation	Outdoor modification/rain protection	○	
	Low ambient temperature protection to -10°F (-23°C)*	○	
	High ambient rating up to 131°F (55°C)	○	
	Premium high dust filtration	○	○
Environmental	Fluid containment system	○	○
	Ultra FG lubricant	○	○
	Ultra EL (16k hours)	○	○
Power Protection	Power outage automatic restart option (PORO)	○	○
	Phase monitor (protection)	○	○
	Electronic solid state reduced voltage starter	†	
General Options	Flow control inlet modulation control	○	
	Comprehensive service and coverage plans	○	○

● Standard feature ○ Optional feature □ Standard on ie models, optional on i models † Optional on ie models "Blank" Not Available



IngersollRandProducts.com

Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a \$13 billion global business committed to a world of sustainable progress and enduring results.



Ingersoll Rand, IR, the IR logo, PAC software, V-Shield and Ultra Coolant are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates. All other trademarks are the property of their respective owners. Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service. Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request. Product improvement is a continuing goal at Ingersoll Rand. Any designs, diagrams, pictures, photographs and specifications contained within this document are for representative purposes only and may include optional scope and/or functionality and are subject to change without notice or obligation.